


WINDOW USE: Attach the MB500 to your KING antenna (steps 1 and 2). Roll down window. Place Hanger Arm over top edge of southern facing window and roll window up. Do not pinch coax when rolling window up. If possible, hang antenna on side of vehicle facing south.

NON WINDOW USE: Attach the MB500 to your KING antenna (steps 1 and 2). Attach the Wall Mount Bracket to an appropriate surface (step 3). Hang antenna on Bracket.




⚠ **NEVER LEAVE UNIT ON VEHICLE WHILE IT IS IN MOTION!** ⚠

- 1** Fasten Base Support to antenna base with (2) supplied screws and (2) supplied nuts.

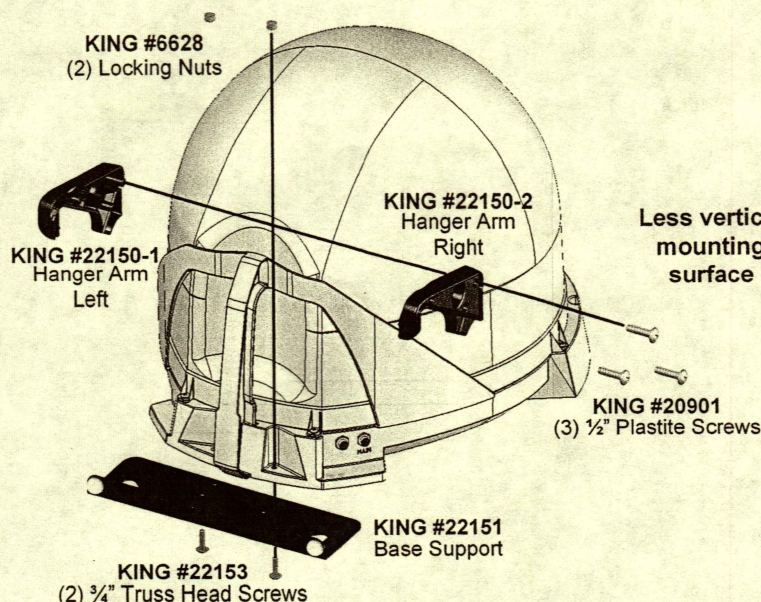


- 2** Fasten (2) Hanger Arms to antenna handle with (3) supplied screws. **DO NOT OVER TIGHTEN SCREWS INTO PLASTIC.**

There are 3 sets of holes in the Base Support. Choose the set that keeps the antenna in the most level position.

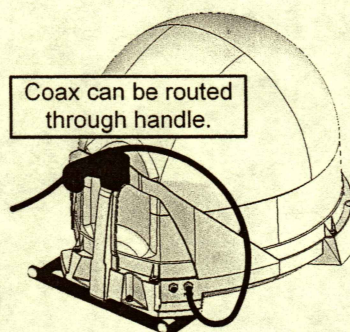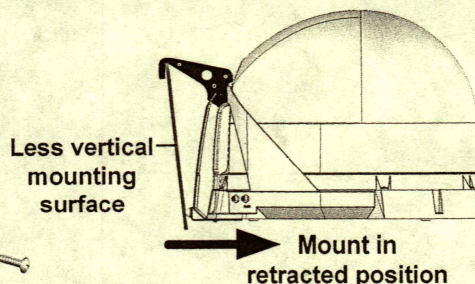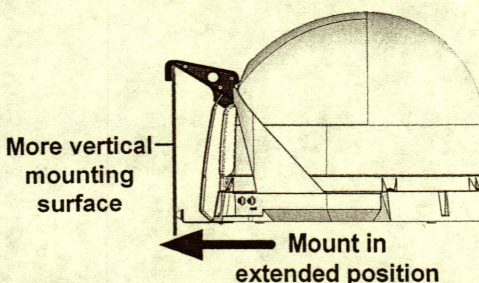

- 3** **NON WINDOW USE:** Mount wall bracket with either tape or fasteners.

Do not apply tape if ambient temperature is below 60°F.
Apply tape only to smooth metal surface or smooth surface with automotive quality paint. Clean all surfaces that tape will adhere to with alcohol wipe or paint friendly degreaser, and let dry before applying VHB tape. Let tape cure 24 hours before using.

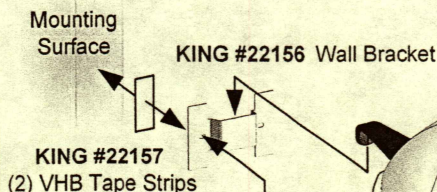

The wall bracket may be screwed to an appropriate surface with appropriate fasteners.

