WINEGARD

Model TR-2000/2077 Tripod/Base Mount


CAUTION: Winegard Company does not warrant this product if a mount pipe longer that 18" is used.

NOT DESIGNED FOR USE WITH RD-9046 OR PM-2000 PORTABLE SATELLITE SYSTEMS.

STEP 1: FOR FIRST TIME USE. To attach adjustment knob using 5/16-18 square nut and nut clamp, put pole into base. Turn upside down.Place nut inside nut clamp, and drop into slot on bottom of base, making sure the open side of the nut clamp is toward the flat side of the base, Figure 1 and 1A. Screw in adjustment knob. For travel/storage, remove pipe.

STEP 2: To store compass when not in use, attach compass to base using velcro provided, Figure 2.

STEP 3: Secure level to base using double-sided tape (provided), Figure 2.

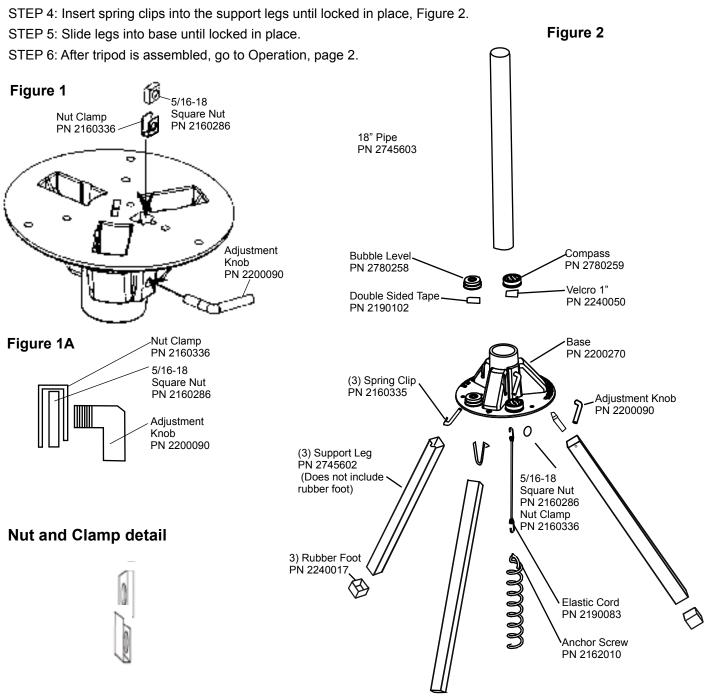

 \Box

TRIPOD MOUNT OPERATION

STEP 1. Turn your receiver on, and using the installation menus, determine the heading (azimuth) and elevation for your location.

STEP 2. Remove the compass from the mount. (The metal pipe and antenna WILL effect compass operation.) Using the compass, determine the best location for the mount. The satellite signal WILL NOT go through trees, buildings, etc.

STEP 3. After determining the best location, screw the anchor into the ground. A large screwdriver or piece of pipe through the top loop of the anchor makes this easier.

STEP 4. Attach the elastic cord to the bottom of the mount base, Figure 3.

STEP 5. Set mount over the anchor screw and attach elastic cord to the anchor, Figure 4.

STEP 6. If the compass was removed earlier, reattach it to the mount base. Rotate the mount so the arrow on the mount points north.

STEP 7. Adjust the mount legs until bubble level shows mount is level.


STEP 8. Attach mount pipe to the antenna and tighten. Adjust antenna elevation to the correct setting for your location.

STEP 9. Set the antenna/pipe onto the mount. Connect antenna to receiver.

Figure 3

STEP 10. Using the heading (azimuth) markings on mount base, **SLOWLY** rotate antenna to the correct heading. If you do not find the satellite, be sure you have entered the correct zip code for your location, and that there are no obstructions (trees, buildings, hills, etc.).

STEP 11. After you have found the satellite, secure the pipe using the adjustment knob.

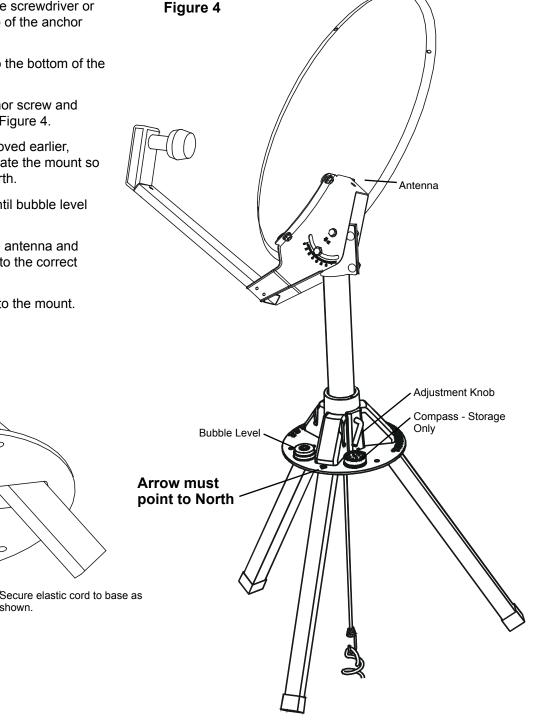

BASE MOUNT OPERATION

STEP 1. Turn your receiver on, and using the installation menus, determine the heading (azimuth) and elevation for your location.

STEP 2. Remove the compass from the mount. (The metal pipe and antenna WILL effect compass operation.) Using the compass, determine the best location for the mount. The satellite signal WILL NOT go through trees, buildings, etc.


STEP 3. After you have determined the best location, secure mount to deck using 1/4" diameter lag screws or bolts (not supplied). Mount must be level and the arrow on the mount must point north, Figure 5.

STEP 4. Attach mount pipe to the antenna and tighten. Adjust antenna elevation to the correct setting for your location.

STEP 5. Set the antenna/pipe onto the mount. Connect antenna to receiver.

STEP 6. Using the heading (azimuth) markings on mount base, **SLOWLY** rotate antenna to the correct heading. If you do not find the satellite, be sure you have entered the correct zip code for your location and that there are no obstructions (trees, buildings, hills, etc.).

STEP 7. After you have found the satellite, secure the pipe using the adjustment knob.

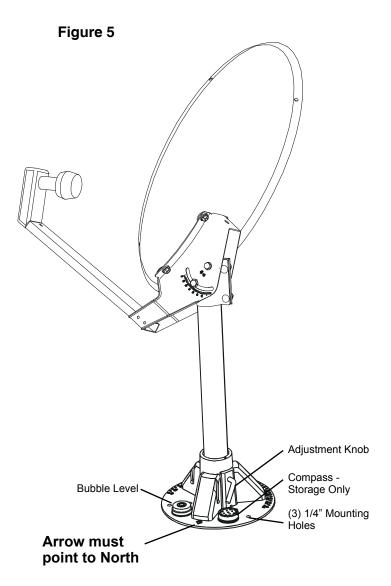

WINEGARD MOBILE PRODUCTS LIMITED WARRANTY (2 YEARS PARTS; 1 YEAR LABOR)

Winegard Company warrants this product against defects in materials or workmanship for a period of two (2) years from the date of original purchase. During year one (1) of such warranty, Winegard Company will also pay authorized labor costs to an authorized Winegard dealer to repair or replace defective products. No warranty claim will be honored unless at the time the claim is made, Customer presents proof of purchase to an authorized Winegard dealer (to locate the nearest authorized Winegard dealer, contact Winegard Company, 3000 Kirkwood Street, Burlington, Iowa 52601, Telephone 800-288-8094 or visit www.winegard.com). Customer must provide proof of purchase with a dated sales receipt for the Winegard product to verify the product is under warranty. If the date of purchase cannot be verified, the warranty period shall be considered to begin thirty (30) days after the date of manufacture.

If a defect in material or workmanship is discovered, Customer may take the product to an authorized Winegard dealer for service. Customer must provide proof of purchase to verify the product is under warranty. If the product is brought to an authorized Winegard dealer for service prior to expiration of year one (1) of the warranty period and a defect in material or workmanship is verified by Winegard Technical Services, Winegard Company will cover the Winegard dealer's labor charges for warranty service. The Winegard dealer must contact Winegard Technical Services in advance for pre-approval of the service is at the sole discretion of Winegard Company.

Alternatively, Customer may ship the product prepaid to Winegard Technical Services (located at 3111 Kirkwood Street, Burlington, Iowa 52601, Telephone 800-788-4417). Customer must return the product along with a brief description of the problem and provide Winegard Technical Services with Customer's name, address, and phone number. Customer must also provide proof of purchase to verify the product is under warranty. If the product is returned before the expiration of the warranty period, Winegard Company will (at its option) either repair or replace the product.

This Limited Warranty does not apply if the product has been damaged, deteriorates, malfunctions or fails from: improper installation, misuse, abuse, neglect, accident, tampering, modification of the product as originally manufactured by Winegard in any manner whatsoever, removing or defacing any serial number, usage not in accordance with product instructions or acts of nature such as damage caused by wind, lightning, ice or corrosive environments such as salt spray and acid rain. This Limited Warranty also does not apply if the product becomes unable to perform its' intended function in any way as a result of the television signal provider making any changes in technology or service.

RETURN AUTHORIZATION POLICY

A Return Material Authorization (RMA) is required prior to returning any product to Winegard Company or Winegard Warranty Services under this warranty policy. Please call our Technical Services Department at 800-788-4417 or send an e-mail to warranty@winegard.com to obtain the RMA number. Please furnish the date of purchase when requesting an RMA number. Enclose the product in a prepaid package and write the RMA number in large, clear letters on the outside of the package. To avoid confusion or misunderstanding, a shipment(s) without an RMA number(s) or an unauthorized return(s) will be refused and returned to Customer freight collect.

WINEGARD COMPANY DOES NOT ASSUME ANY LIABILITIES FOR ANY OTHER WARRANTIES, EXPRESS OR IMPLIED. MADE BY ANY OTHER PERSON.

ALL OTHER WARRANTIES WHETHER EXPRESS, IMPLIED OR STATUTORY INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE LIMITED TO THE TWO YEAR PERIOD OF THIS WARRANTY.

In states that do not allow limitations on implied warranties, or the exclusion of limitation of incidental or consequential damages, the above limitations or exclusions do not apply.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion of limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives Customer specific legal rights. Customer may also have other rights that may vary from state to state.

SATELLITE RECEIVER WARRANTY

See manufacturer's limited warranty policy.

WS-MOBWARREV2 Rev. 1/10