


Installation ☒ Checklist & Warranty Activation Information

Dometic RM3662 & RM3862 Replacement

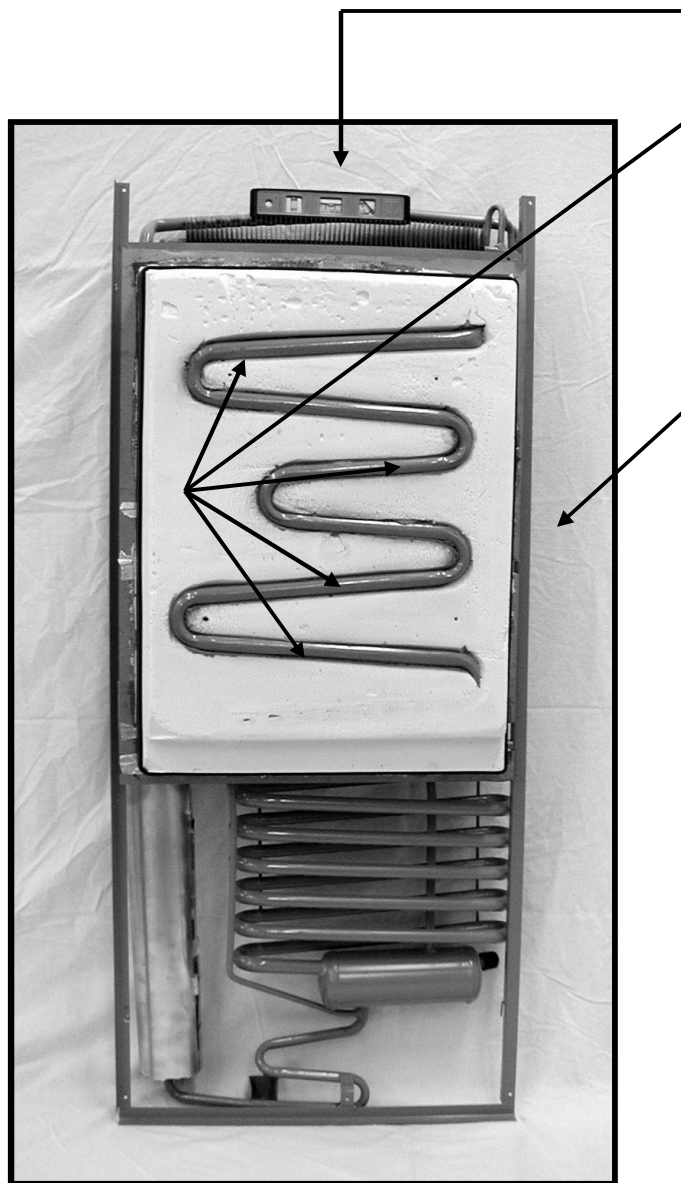

_____ Make sure condenser fins at the top of the refrigerator in the back are **level**.

_____ Place ¼ inch bead of **thermal mastic** on any exposed metal tubing in the foam pack that comes in contact with the aluminum fins. Thermal mastic is not a sealant. It is used to transfer the cold from the cooling unit into the freezer and refrigerator. **DO NOT** use thermal mastic as a sealant around the foam pack!

_____ The **foam tape** around the foam pack eliminates the need for any sealant around the foam pack.

_____ We recommend a light film of **petroleum jelly** be applied to the foam pack cavity before placing the cooling unit into the cabinet.

_____ Seal around the cardboard back with **foil tape**.

_____ Put the gas **flue baffle** back into place.

_____ Make sure the refrigerator is **level** once installed back into the cabinet and that the camper is level before operating the refrigerator.

_____ **Return** the Exchange Core by submitting a core return form at the listed website.

For Technical Assistance call:

(641) 322-4888

Warranty Activation

Required Warranty Activation form may be submitted online at

www.NordicCoolingUnits.com

Or fill in the form below and mail to:

Nordic Cooling Units
2365 125th St
Corning, IA 50841

Date of Installation _____

Customer Name _____

Customer Address _____

Customer Phone _____

Dealer Name _____

Dealer Address _____

Dealer Phone _____

Name of Installer _____

Please make a copy for the customer to keep with the refrigerator!